



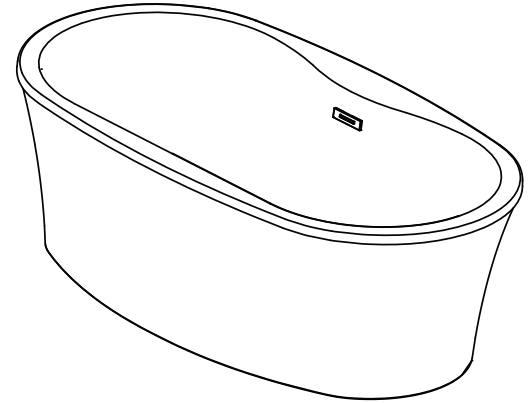




## Designer Collection Specifications

### AD553P

#### AirMasseur<sup>®</sup> & Soaking

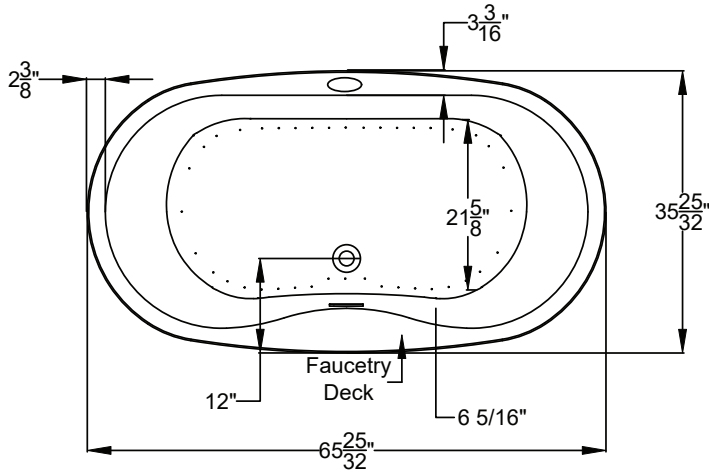

AIRMASSEUR BLOWER  
MUST BE REMOTE  
MOUNTED OR  
INSTALLED IN AN AEC  
EQUIPMENT CABINET.

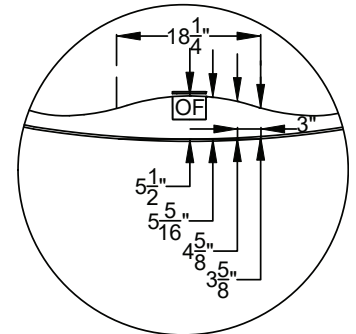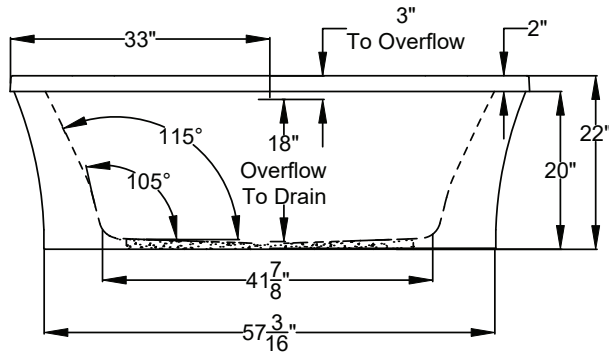

Faucetry Deck  
Flat Dimensions

Patents received or pending.



Includes Linear Overflow Drain Assembly

Note: Dimensional Tolerances:  $\pm 1/4$ "

<b>Drop-in Hole Size:</b>	N/A
<b>Operating Capacity:</b>	41 Gal.
<b>Overflow Capacity:</b>	84 Gal.
<b>Floor Loading / sq.ft. (A/S):</b>	56.4 / 53.2 lbs.
<b>Carton Wt. (A/S):</b>	185 / 147 lbs.
<b>Cube:</b>	36.6 ft. <sup>3</sup>

**Construction:** Fiberglass reinforced acrylic bath  
with Level Form<sup>™</sup> full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

<b>Standard</b>	 <p>A 120V system that includes a 1HP, variable speed blower with integral heater; automatic purge cycle; an electronic control that operates blower and blower speed for continuous, wave, or massage pulse modes; and a 20-minute timer.</p>
<b>Premier</b>	 <p>A 120V system that includes a 1HP, variable speed blower with integral heater; automatic purge cycle; (2) Chromatherapy mood lights; Automatic Ozone System; an digital control that operates blower and blower speed for continuous, wave, or massage pulse modes; enhanced user control options; and a 20-minute timer. Control keypad operates blower and blower speed for continuous, wave, or pulse massage modes, LED Chromatherapy lights, and shows equipment status, and time remaining.</p>