




## Integrity<sup>®</sup> Collection Specifications

### B3260-SL/SR

MicroSilk<sup>®</sup>

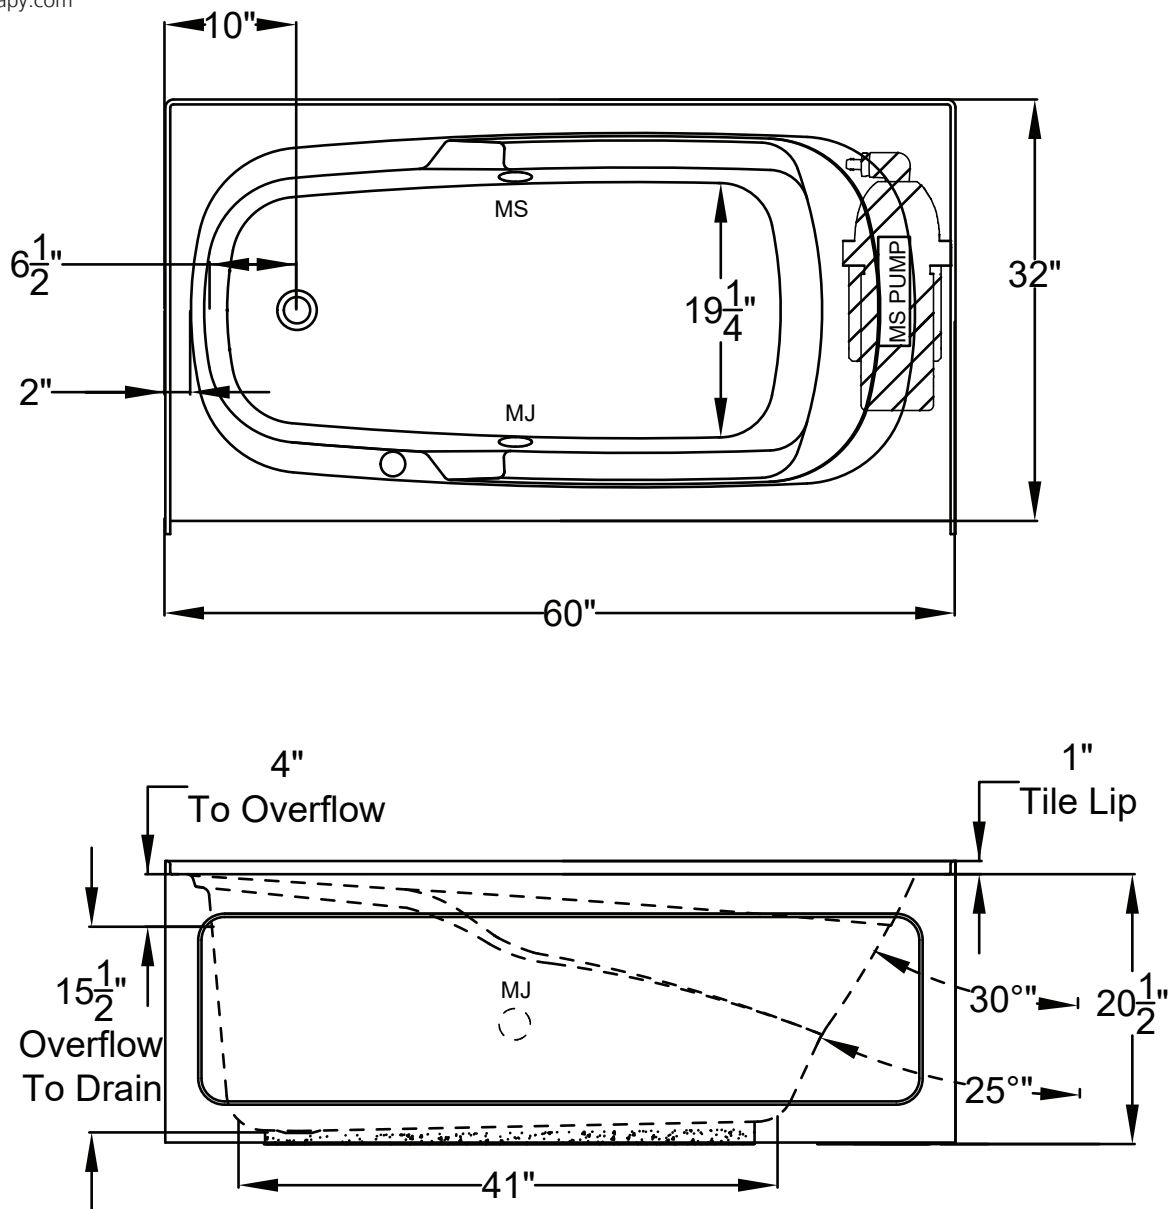


Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4$ "

**Drop-in Hole Size:** N/A  
**Operating Capacity:** 32 Gal.  
**Overflow Capacity:** 52 Gal.  
**Floor Loading / sq.ft.:** 50.8 lbs.  
**Carton Wt.:** 125 lbs.  
**Cube:** 28.1 ft.<sup>3</sup>

Air Switch Control



Includes a quiet, 120V MicroSilk<sup>®</sup> System, 1 MicroSilk<sup>®</sup> Delivery Port. Requires (1) 20A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form<sup>™</sup> pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*