




## Integrity® Collection Specifications

**B3666**

## Whirlpool & Soaking

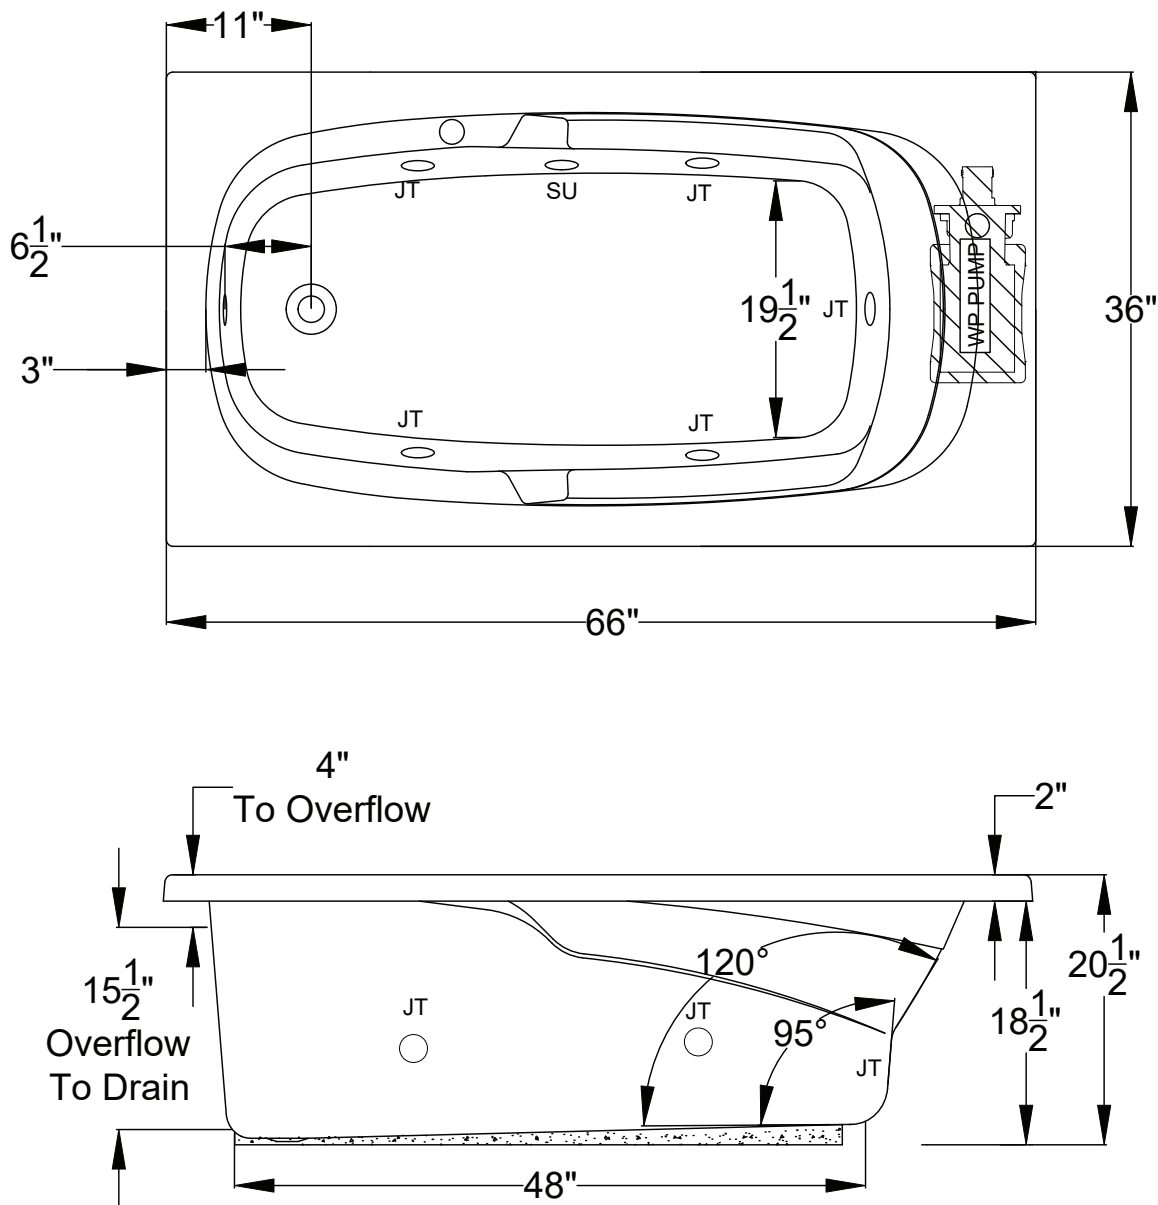

Patents received or pending.

Note: Dimensional Tolerances: +1/4"

**Drop-in Hole Size:** 34" x 64"

**Operating Capacity:** 39 Gal.


**Overflow Capacity:** 61 Gal.

**Floor Loading / sq.ft. (WP/Soaking):** 44.2 / 41.5 lbs.

**Carton Wt. (WP/Soaking):** 108 / 73 lbs.

**Cube:**  $34.3 \text{ ft.}^3$

## Air Switch Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*