


## Integrity<sup>®</sup> Collection Specifications

### B4260

### AirMasseur<sup>®</sup>

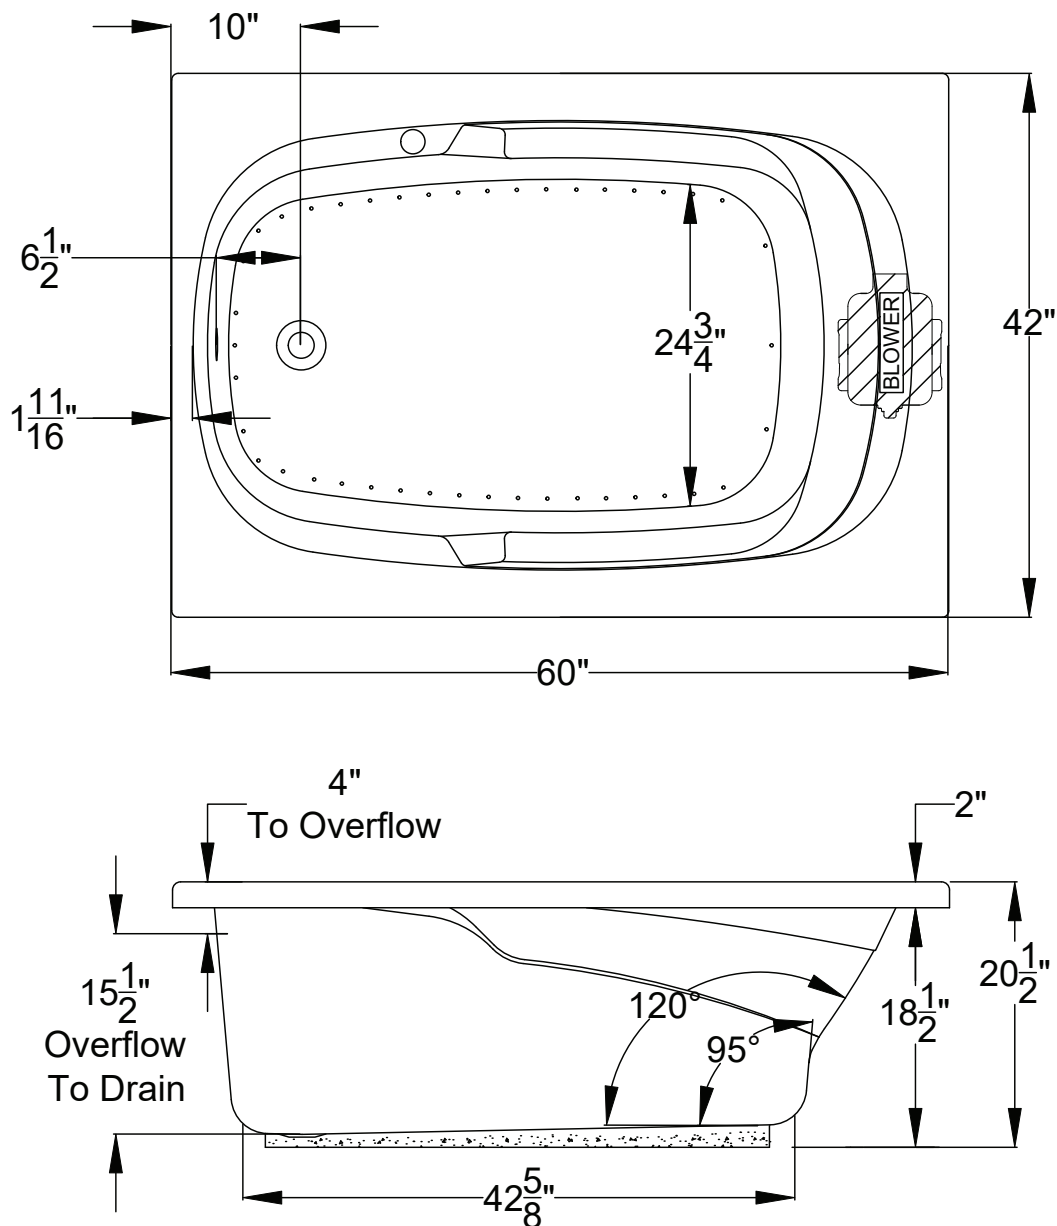


Patents received or pending.

Note: Dimensional Tolerances: ±1/4"

**Drop-in Hole Size:** 58 x 40"  
**Operating Capacity:** 44 Gal.  
**Overflow Capacity:** 65 Gal.  
**Floor Loading / sq.ft.:** 50.8 lbs.  
**Carton Wt.:** 124 lbs.  
**Cube:** 28.1 ft.<sup>3</sup>

Air Switch Control



Includes a quiet, 120v, 3/4 HP, variable speed air blower with an integral air heater, 20-minute timer and automatic purge cycle. Air switch operates the on/off and speed functions of the blower. Requires (1) 15A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form<sup>™</sup> pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*