




## Integrity<sup>®</sup> Collection Specifications

### B4272-SL/SR

### Whirlpool & Soaking

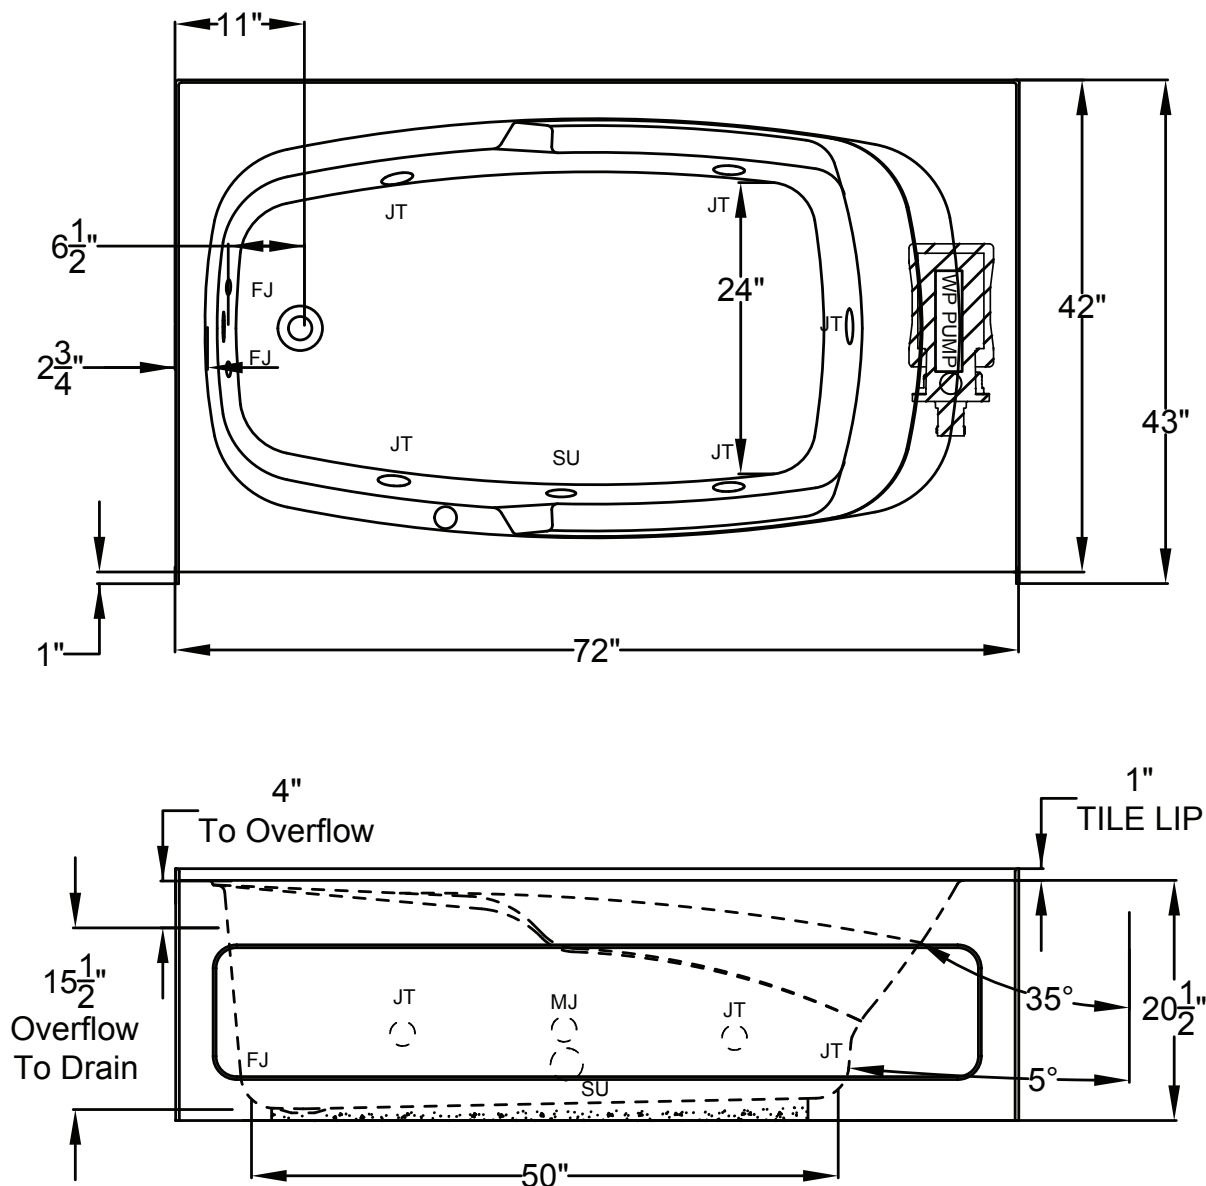


Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4$ "

|   |                       |
|---|-----------------------|
| <b>Drop-in Hole Size:</b>                   | N/A                   |
| <b>Operating Capacity:</b>                  | 49 Gal.               |
| <b>Overflow Capacity:</b>                   | 77 Gal.               |
| <b>Floor Loading / sq.ft. (WP/Soaking):</b> | 41.5 / 40.2 lbs.      |
| <b>Carton Wt. (WP/Soaking):</b>             | 139 / 118 lbs.        |
| <b>Cube:</b>                                | 43.2 ft. <sup>3</sup> |

Air Switch Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form<sup>™</sup> pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*