




## Designer Collection Specifications

### EL535

#### MicroSilk<sup>®</sup> - AirMasseur<sup>®</sup>

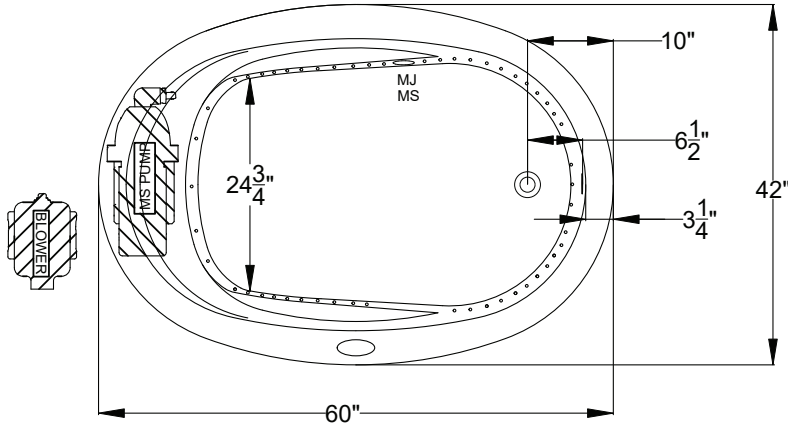

Blower Must Be Remote Mounted

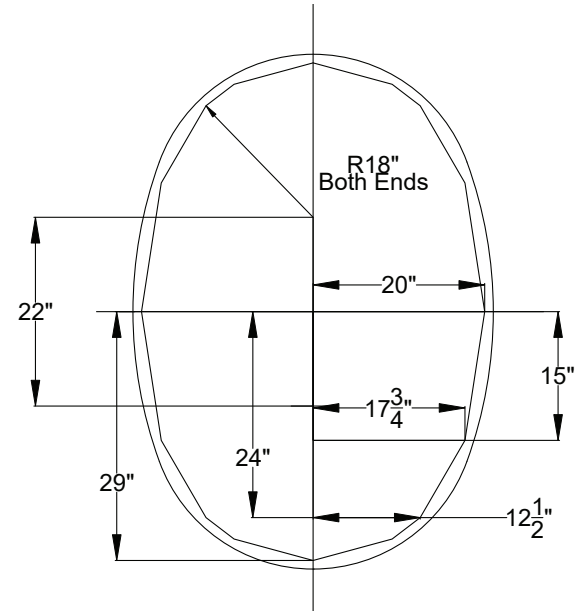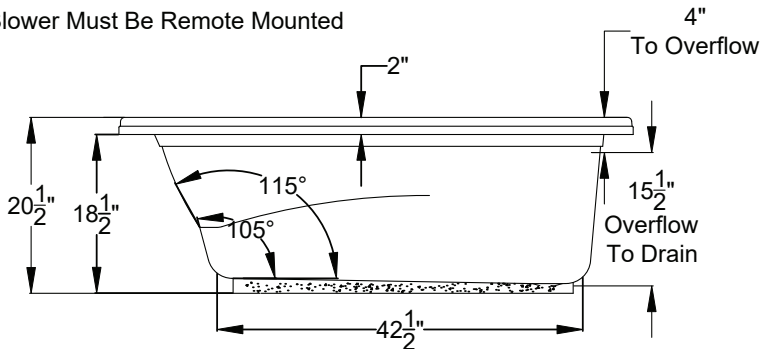

DROP-IN HOLE SIZE

#### REMOTE MOUNTING THE BLOWER:

If an extension cord is required,  
use a minimum 16 AWG cord  
with a maximum of 20ft length



Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4"$

**Drop-in Hole Size:** See Diagram  
**Operating Capacity:** 49 Gal.  
**Overflow Capacity:** 77 Gal.  
**Floor Loading / sq.ft.:** 50.4 lbs.  
**Carton Wt.:** 148 lbs.  
**Cube:** 36.2 ft.<sup>3</sup>

**Construction:** Fiberglass reinforced acrylic bath  
with Level Form<sup>™</sup> full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

Standard	 <p>A 120V system that includes a MicroSilk<sup>®</sup> unit; a 1HP, variable speed air blower with integral air heater; automatic purge cycle; an electronic control that operated the MicroSilk<sup>®</sup> unit, blower, and blower speed for continuous, pulse or wave massage modes; and a 20-minute timer.</p>
Premier	 <p>A 120V system that includes a MicroSilk<sup>®</sup> unit; a 1HP, variable speed air blower with integral air heater; automatic purge cycle; (2) Chromatherapy mood lights; Automatic Ozone System; a digital control with LCD display that operates the MicroSilk<sup>®</sup> Unit, blower and blower speed for continuous, pulse or wave massage modes; enhanced user control options; and a 20-minute timer. Control keypad operates the MicroSilk<sup>®</sup> unit, blower and blower speed for continuous, pulse or wave massage modes, LED Chromatherapy lights and shows MicroSilk<sup>®</sup> status, blower speed, and time remaining.</p>