




# Designer Collection Specifications


## ES553

### MicroSilk® - Whirlpool

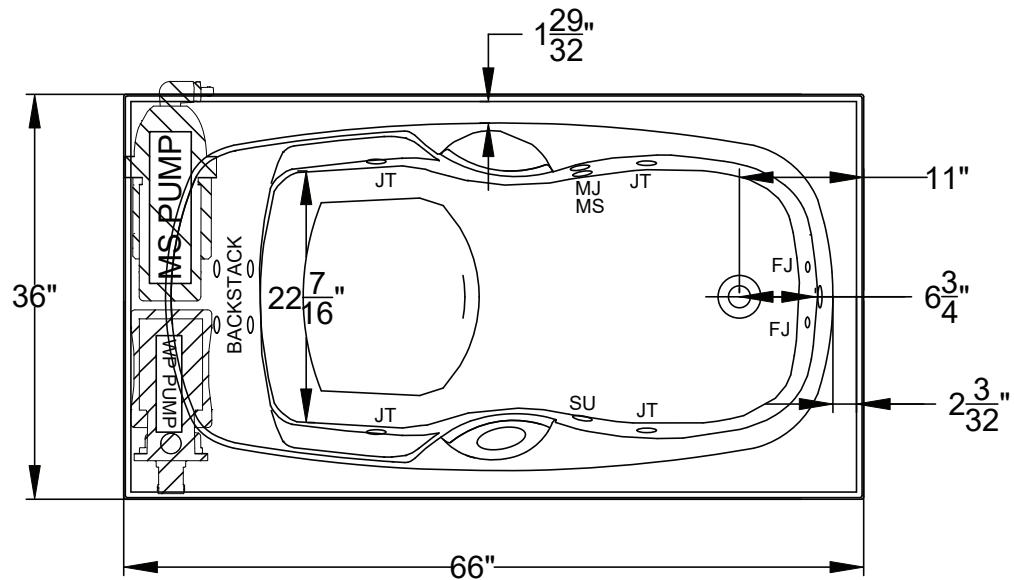

Note: Equipment may extend beyond the outside perimeter of the bath.

Consult factory for details.

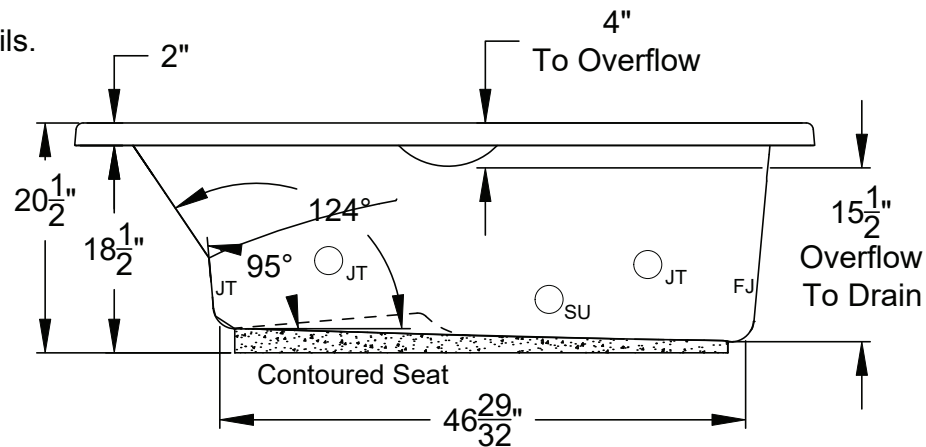



Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4"$

**Drop-in Hole Size:** 64" x 34"  
**Operating Capacity:** 47 Gal.  
**Overflow Capacity:** 67 Gal.  
**Floor Loading / sq.ft.:** 53.1 lbs.  
**Carton Wt.:** 159 lbs.  
**Cube:** 34.3 ft.<sup>3</sup>

**Construction:** Fiberglass reinforced acrylic bath with Level Form™ full-support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*

Standard	 <p>A 120V system that includes a MicroSilk® unit; a quiet 1-1/2 HP, 1-speed whirlpool pump; an electronic control; and a 20-minute timer. The keypad also operates the optional Jetted Neck Pillow.</p>
Premier	 <p>A 120V system that includes a MicroSilk® unit; a quiet 1-1/2 HP, 1-speed whirlpool pump; bath heater; (2) Chromatherapy mood lights; Automatic Ozone System; a digital control with LCD display; enhanced user control options; and a 20-minute timer. Control keypad operates the MicroSilk® and Whirlpool pumps, LED Chromatherapy mood lights, optional Jetted Neck Pillow, and shows equipment status, and time remaining.</p>