

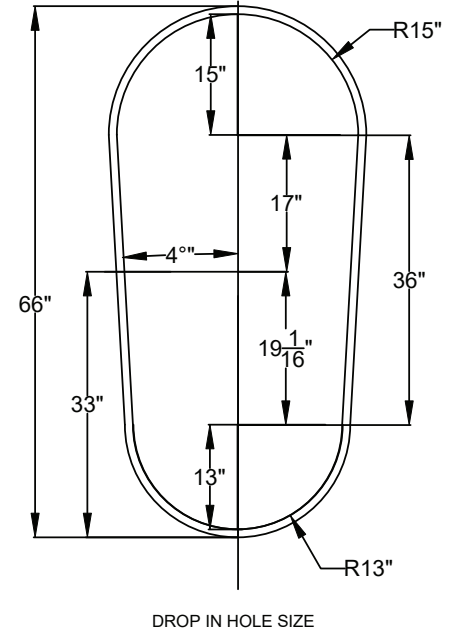


## Designer Collection Specifications

# HE5527

## Air-Whirlpool

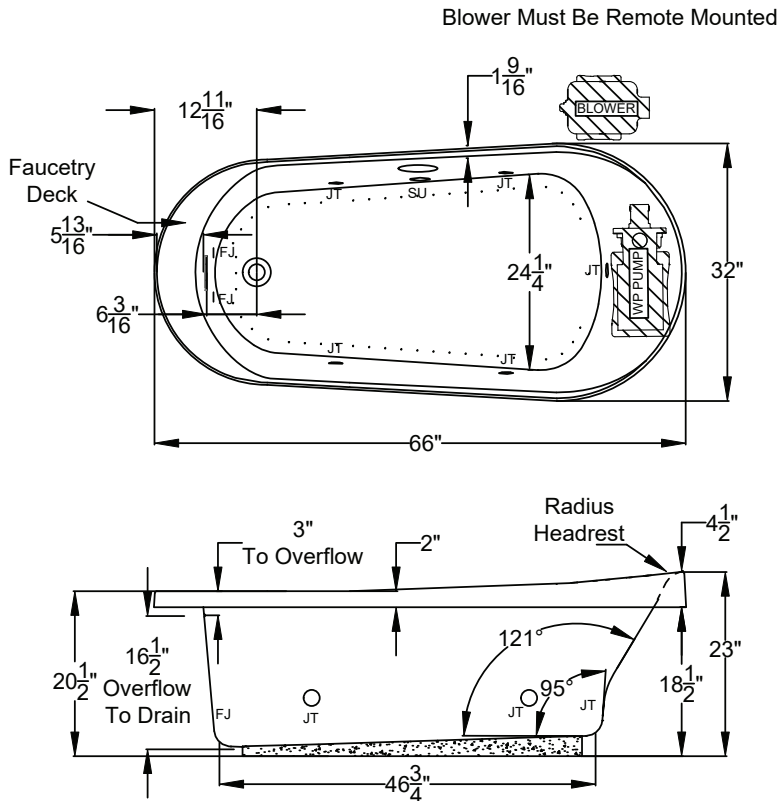

Faucetry Deck  
Flat Dimensions

Note: Equipment may extend  
beyond the outside perimeter  
of the bath.  
Consult factory for details.

Patents received or pending.



Includes Linear Overflow Drain Assembly

Note: Dimensional Tolerances:  $\pm 1/4$ "

<b>Drop-in Hole Size:</b>	See Diagram
<b>Operating Capacity:</b>	39 Gal.
<b>Overflow Capacity:</b>	81 Gal.
<b>Floor Loading / sq.ft.:</b>	60 lbs.
<b>Carton Wt.:</b>	165 lbs.
<b>Cube:</b>	36.5 ft. <sup>3</sup>

**Construction:** Fiberglass reinforced acrylic bath  
with Level Form™ full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

<b>Standard</b>	 <p>A 120V system that includes a quiet 1-1/2 HP, 1-speed whirlpool pump; a 1HP, variable speed air blower with integral air heater; automatic purge cycle; an electronic control that operates the pump, blower and blower speed for continuous, pulse or wave massage modes; and a 20-minute timer. The keypad also operates the optional Jetted Neck Pillow.</p>
<b>Premier</b>	 <p>A 120V system that includes a quiet 1-1/2 HP, 1-speed combination whirlpool pump/heater; a 1HP, variable speed air blower with integral air heater; (2) Chromatherapy Mood Lights; Automatic Ozone System; automatic purge cycle; a digital control with LCD display; and a 20-minute timer. Control keypad operates the pump, blower and blower speed for continuous, pulse or wave massage modes, LED Chromatherapy mood lights, optional jetted neck pillow and shows pump status, blower speed, water temperature and time remaining.</p>