




## Integrity<sup>®</sup> Collection Specifications

### K3060-SL/SR Whirlpool & Soaking

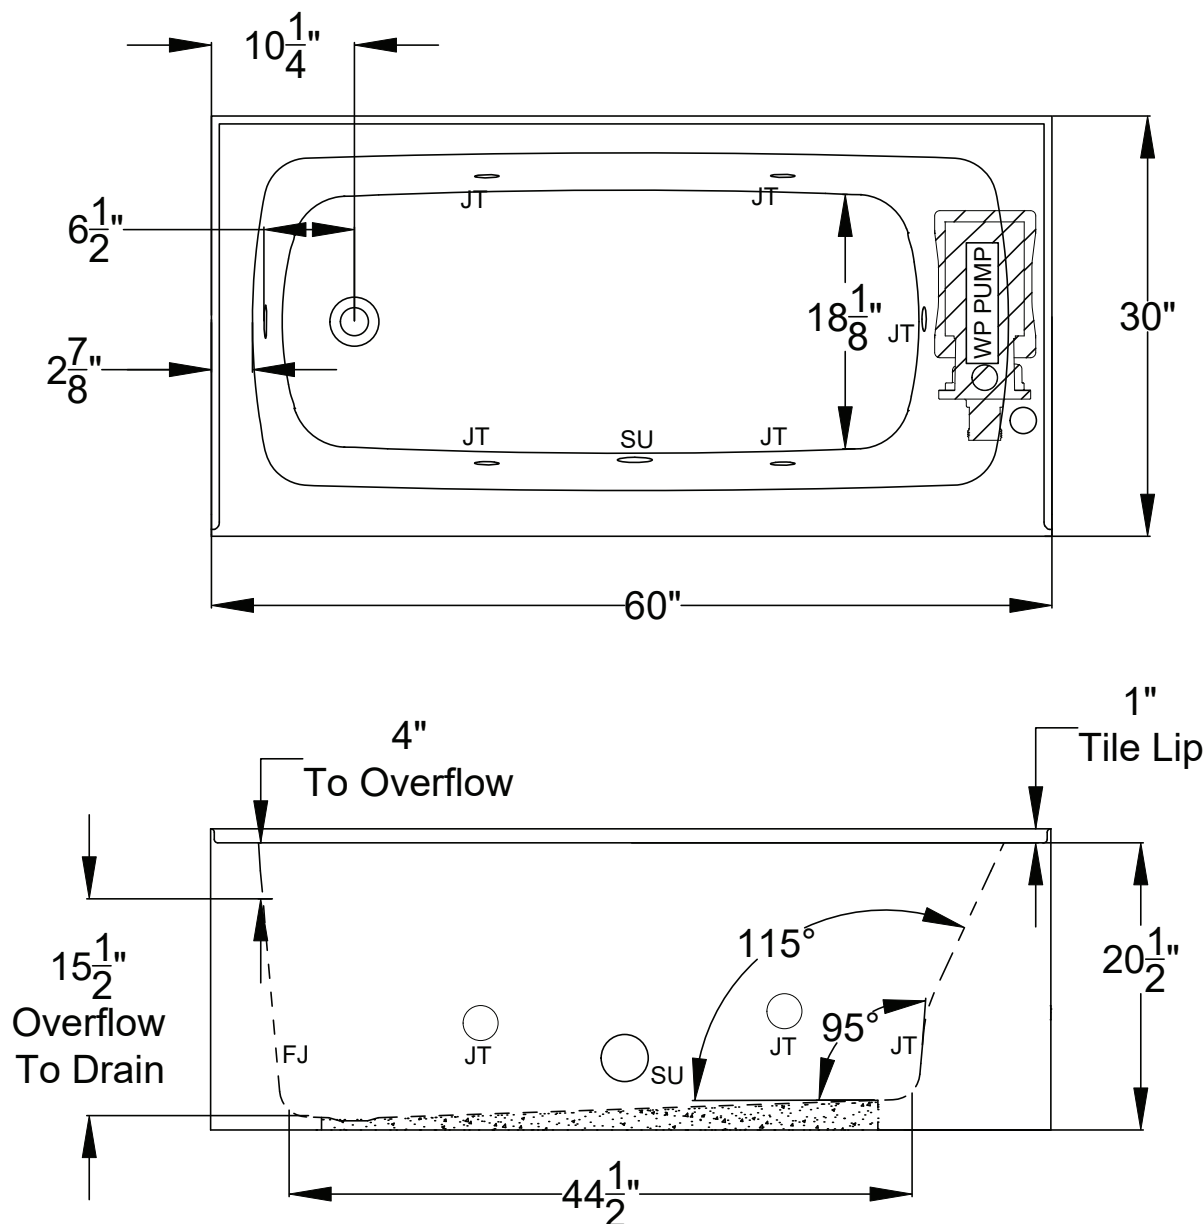

Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4"$

<b>Drop-in Hole Size:</b>	N/A
<b>Operating Capacity:</b>	38 Gal.
<b>Overflow Capacity:</b>	60 Gal.
<b>Floor Loading / sq.ft. (WP/Soaking):</b>	58.8 / 55.3 lbs.
<b>Carton Wt. (WP/Soaking):</b>	121 / 86 lbs.
<b>Cube:</b>	26.4 ft. <sup>3</sup>

<b>Air Switch Control</b>		<p>Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.</p>
---------------------------	--	---

**Construction:** Reinforced Acrylic shell mounted on Level Form<sup>™</sup> pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*