
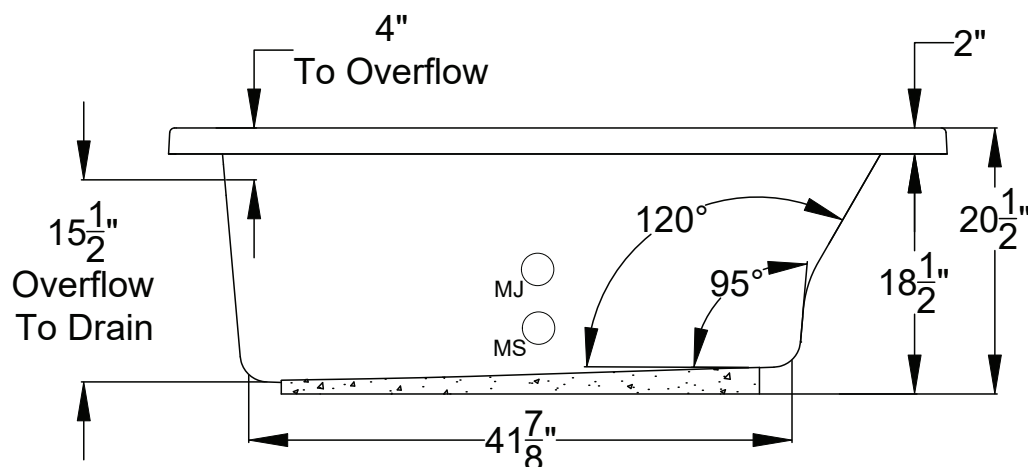


MicroSilk®

Note: Dimensional Tolerances: $\pm 1/4"$

Drop-in Hole Size:	34" x 58"
Operating Capacity:	40 Gal.
Overflow Capacity:	66 Gal.
Floor Loading / sq.ft.:	49.3 lbs.
Carton Wt.:	108 lbs.
Cube:	31.3 ft. ³

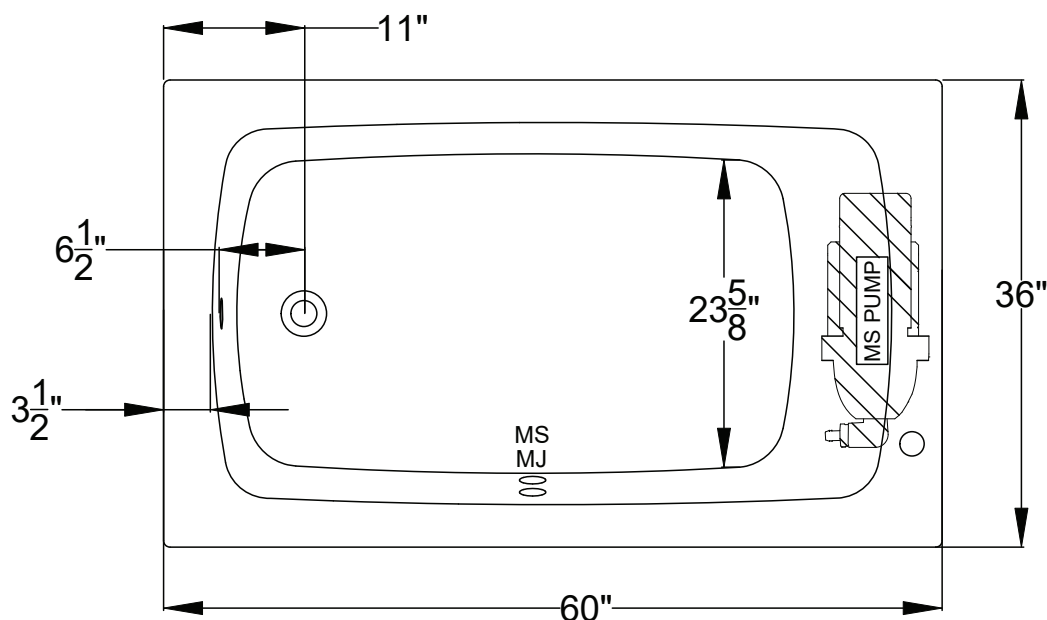

Includes a quiet, 120V MicroSilk® System,
1 MicroSilk® Delivery Port. Requires (1) 20A, 120v
GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

Note: Control Air Switch will be located on bather's left.