


Designer Collection Specifications

LS640

Air-Whirlpool

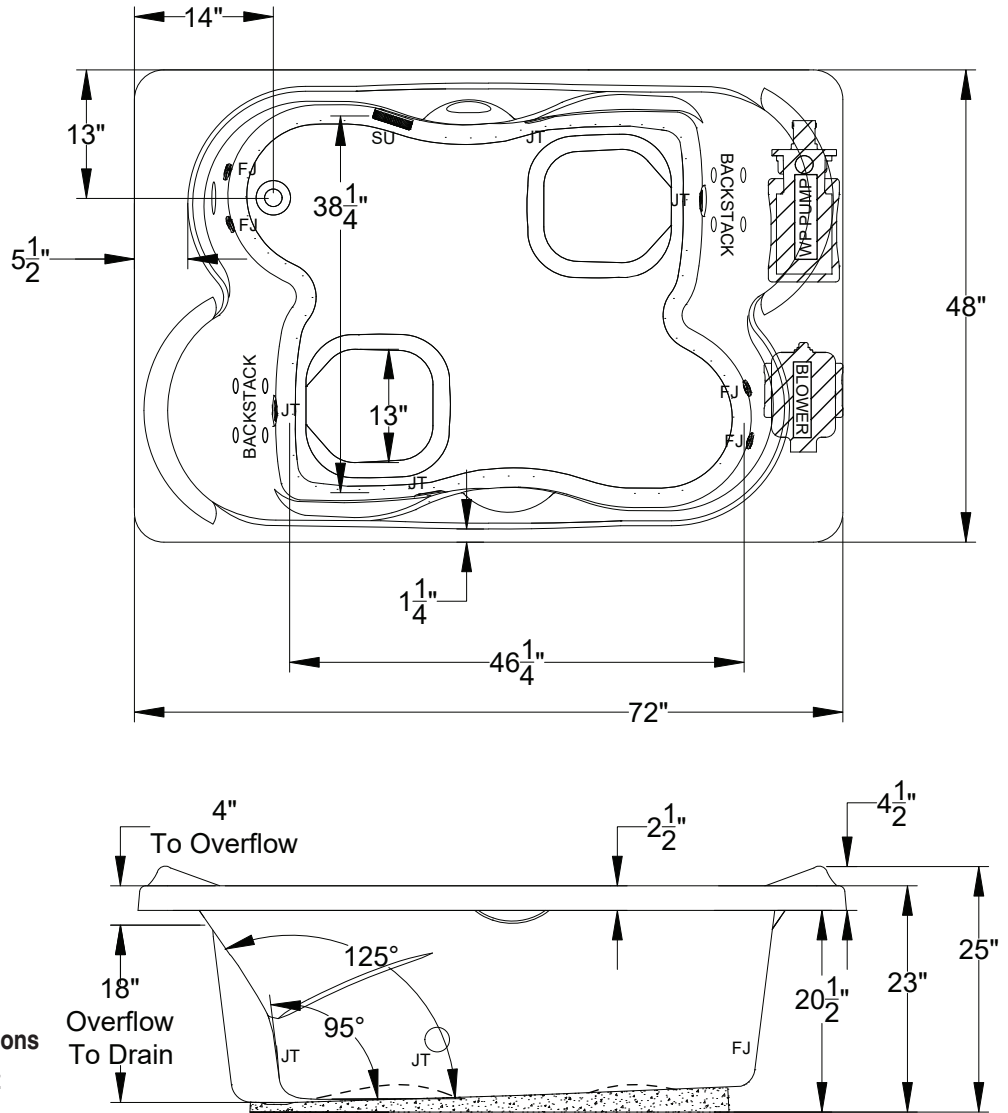

Note: The Premier and Signature Edition versions require a 20A and 15A 120V 60Hz GFCI Circuit

Note: LS640 features a 2HP whirlpool pump.



Patents received or pending.

Note: Dimensional Tolerances: ±1/4"

Drop-in Hole Size: 70" x 46"
Operating Capacity: 100 Gal.
Overflow Capacity: 130 Gal.
Floor Loading / sq.ft. (A/S): 62.9 lbs.
Carton Wt. (A/S): 225 lbs.
Cube: 58.8 ft.³

Construction: Fiberglass reinforced acrylic bath with Level Form™ full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

Standard	 <p>A 120V system that includes a quiet 1-1/2 HP, 1-speed whirlpool pump; a 1HP, variable speed air blower with integral air heater; automatic purge cycle; an electronic control that operates the pump, blower and blower speed for continuous, pulse or wave massage modes; and a 20-minute timer. The keypad also operates the optional Jetted Neck Pillow.</p>
Premier	 <p>A 120V system that includes a quiet 1-1/2 HP, 1-speed combination whirlpool pump/heater; a 1HP, variable speed air blower with integral air heater; (2) Chromatherapy Mood Lights; Automatic Ozone System; automatic purge cycle; a digital control with LCD display; and a 20-minute timer. Control keypad operates the pump, blower and blower speed for continuous, pulse or wave massage modes, LED Chromatherapy mood lights, optional jetted neck pillow and shows pump status, blower speed, water temperature and time remaining.</p>