




## Designer Collection Specifications

# LS640

### Whirlpool & Soaking

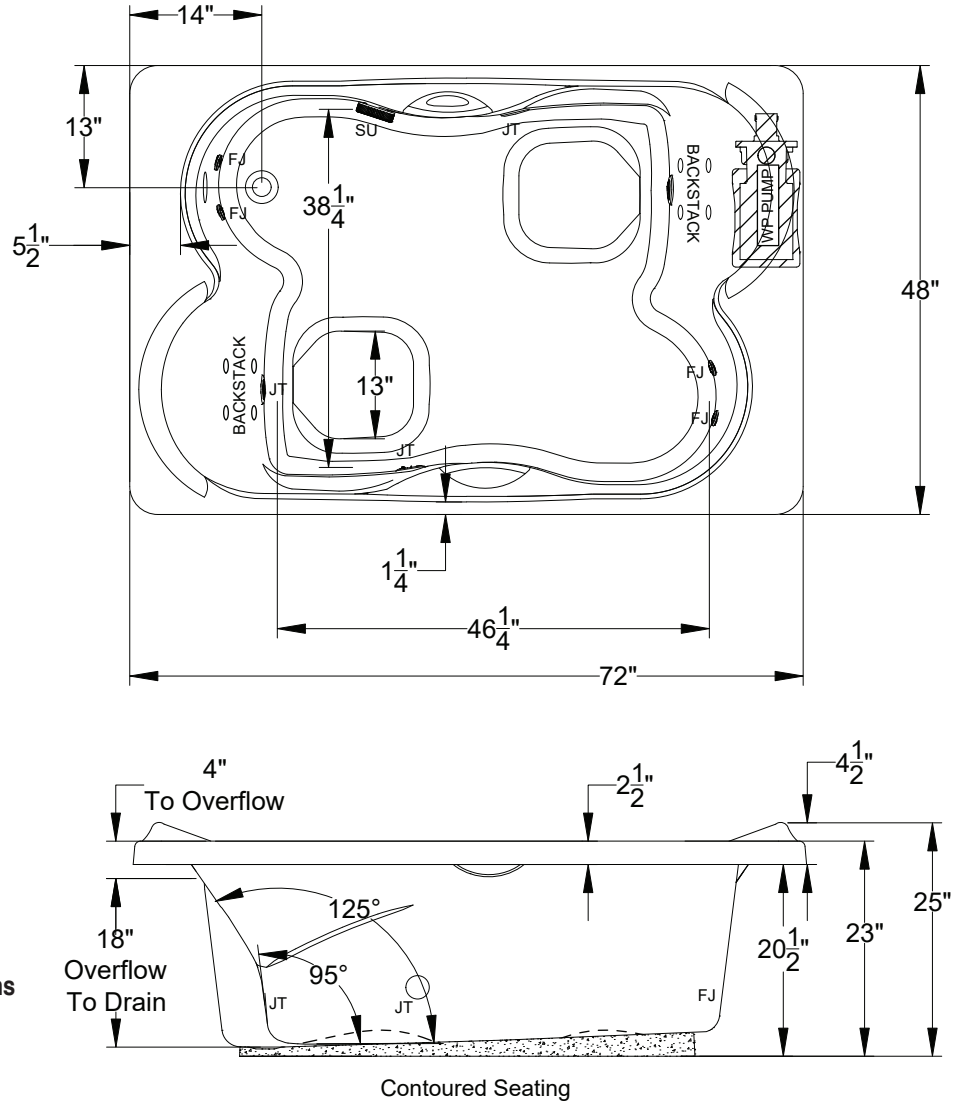

**Note: The Premier and Signature Edition versions require a 20A and 15A 120V 60Hz GFCI Circuit**

Note: LS640 features a 2HP whirlpool pump.



Patents received or pending.

Note: Dimensional Tolerances: ±1/4"

**Drop-in Hole Size:** 70" x 46"  
**Operating Capacity:** 100 Gal.  
**Overflow Capacity:** 130 Gal.  
**Floor Loading / sq.ft. (W/S):** 60.4 / 57.6 lbs.  
**Carton Wt. (W/S):** 177 / 123 lbs.  
**Cube:** 58.8 ft.<sup>3</sup>

**Construction:** Fiberglass reinforced acrylic bath with Level Form™ full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

Standard	 <p>A 120V system that includes a quiet 1-1/2 HP, 1-speed whirlpool pump, an electronic control, and a 20-minute timer. The keypad also operates the optional Jetted Neck Pillow.</p>
Premier	 <p>A 120V system that includes a quiet 1-1/2 HP, 1-speed whirlpool pump, bath heater, (2) Chromatherapy mood lights, Automatic Ozone System, a digital control with LCD display, enhanced user control options, and a 20-minute timer. Control keypad operates the pump, LED Chromatherapy mood lights, optional Jetted Neck Pillow and shows equipment status, and time remaining.</p>