


8328 MacArthur Dr. • North Little Rock, AR 72118 501.771.4477 • Fax: 501.771.2333 Customer Service: 800.255.5766 EMail: tech@jasonhydrotherapy.com www.jasonhydrotherapy.com

Designer Collection Specifications MI635 Whirlpool & Soaking

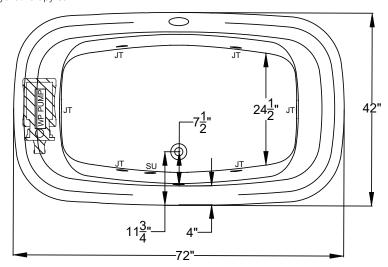

15÷

Overflow


To Drain

493

4"

To Overflow

O_{JT}

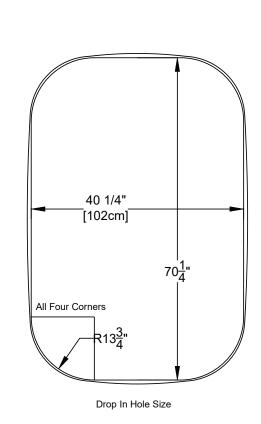

Note: The blower extends approximately 1" past the end radius of the bath. This requires angling the bath into the drop-in hole.

36

112

Patents received or pending.

2 1/4"

Drop-in Hole Size:	See Diagram
Operating Capacity:	58 Gal.
Overflow Capacity:	84 Gal.
Floor Loading / sq.ft. (W/S):	50 / 48.7 lbs.
Carton Wt. (W/S):	
Cube:	48 ft. ³

Construction: Fiberglass reinforced acrylic bath with Level Form[™] full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.



23'

18-

A 120V system that includes a quiet 1-1/2 HP, 1-speed whirlpool pump, an electronic control, and a 20-minute timer. The keypad also operates the optional Jetted Neck Pillow.



Premier

A 120V system that includes a quiet 1-1/2 HP, 1-speed whirlpool pump, bath heater, (2) Chromatherapy mood lights, Automatic Ozone System, a digital control with LCD

display, enhanced user control options, and a 20-minute timer. Control keypad operates the pump, LED Chromatherapy mood lights, optional Jetted Neck Pillow and shows equipment status, and time remaining.

Note: Dimensional Tolerances: ±1/4"