



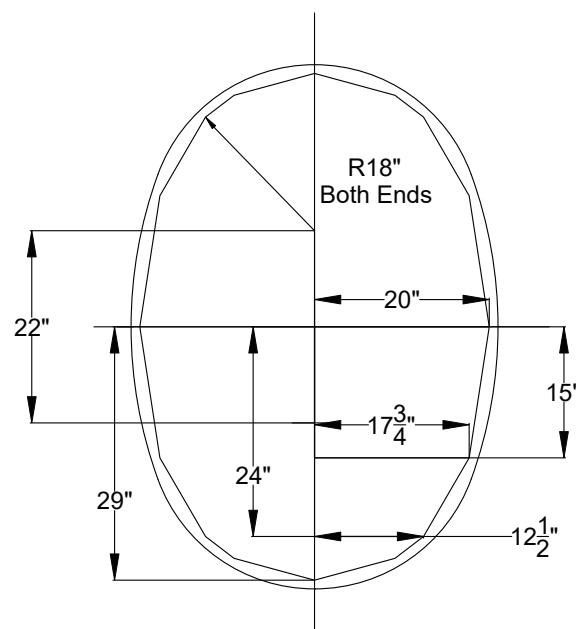

Integrity[®] Collection Specifications

N4260

MicroSilk[®]

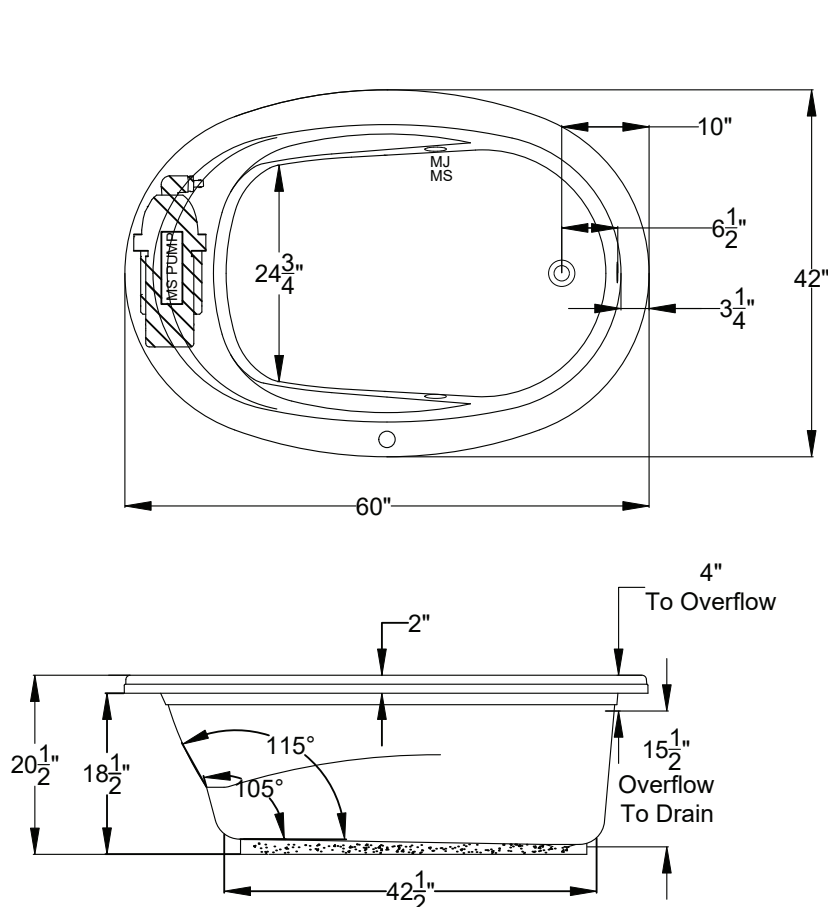


DROP-IN HOLE SIZE

Patents received or pending.

Note: Dimensional Tolerances: $\pm 1/4"$

Drop-in Hole Size: See Diagram
Operating Capacity: 44 Gal.
Overflow Capacity: 77 Gal.
Floor Loading / sq.ft.: 48.1 lbs.
Carton Wt.: 115 lbs.
Cube: 36.2 ft.³

Air
Switch
Control



Includes a quiet, 120V MicroSilk[®] System,
1 MicroSilk[®] Delivery Port. Requires (1) 20A, 120v
GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on
Level Form[™] pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories)
U.S. and Canadian and with International Association of Plumbing and Mechanical
Officials (IAPMO). Consult factory with your listing requirements.*