


## Integrity<sup>®</sup> Collection Specifications

# N4272

## MicroSilk<sup>®</sup>

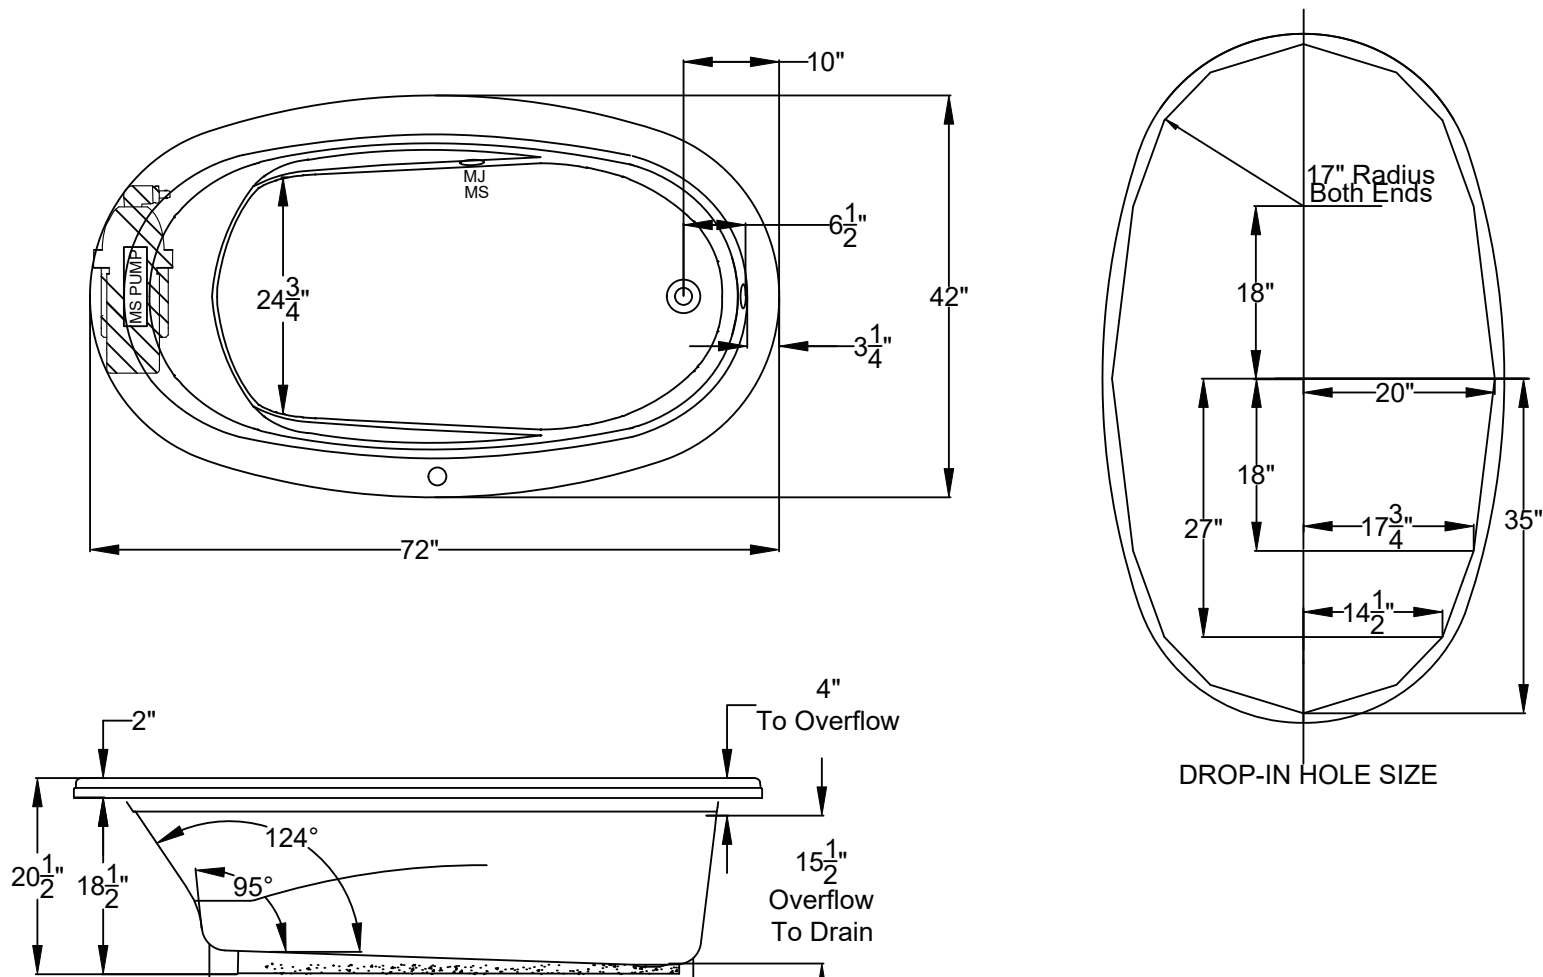


Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4$ "

**Drop-in Hole Size:** See Diagram  
**Operating Capacity:** 52 Gal.  
**Overflow Capacity:** 80 Gal.  
**Floor Loading / sq.ft.:** 47.4 lbs.  
**Carton Wt.:** 141 lbs.  
**Cube:** 43.2 ft.<sup>3</sup>

Air Switch Control



Includes a quiet, 120V MicroSilk<sup>®</sup> System, 1 MicroSilk<sup>®</sup> Delivery Port. Requires (1) 20A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form<sup>™</sup> pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

**Note:** The blower extends approximately 1" past the end radius of the bath. This requires angling the bath into the drop-in hole.