



OWNER'S MANUAL

Integral Skirt Cover INSTALLATION INSTRUCTIONS

INTRODUCTION

The Skirt Kit is designed to provide access for servicing of the whirlpool pump and control equipment.

INSPECTION

Inspect the kit for damage or shortages prior to installation. Damage sustained in transit is the responsibility of the carrier. If transit damage is discovered, notify the carrier immediately and file a freight claim with them.

INSTALLATION

1. Integral Skirt Cover Removal:

- Lift the integral skirt cover by the lower edge until the inner skirt cover clips are above the bottom of the skirt access cutouts.
- Gently pull the skirt cover out and down away from the skirt cover access cutouts only far enough to clear the access cutouts. The skirt cover will completely disengage itself from the bath giving access to the motor and/or blower and the control system. **See Figs. 1 & 2.**

2. Integral Skirt Cover Installation:

- Center the skirt cover below the skirt cover access cutouts of the bath.
- Lift the skirt cover angling it slightly until the upper skirt cover clip engages the the top of the skirt access cutouts.
- Continue lifting the skirt cover until the bottom skirt cover clip clears the bottom of the skirt access cutouts.
- Gently push the bottom of the skirt cover in and down until the bottom of the skirt cover clip engages the bottom of the skirt access cutouts. **See Figs. 1 & 3.**

Figure 1

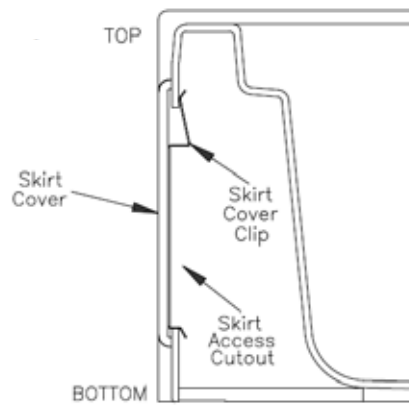


Figure 2

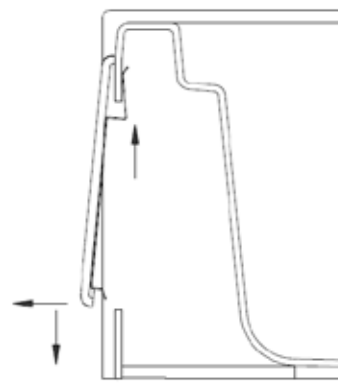


Figure 3

